



CO-MATIG

A POWER OF GOOD...

HOLYTEK

I SVERIGE AB
SE-512 91 Sexdrega
Tel +46 325 625547



SYMBOL OF EXCELLENCE
WINNER



GOOD DESIGN
PRODUCT



Powerfeeder will take your existing woodworking equipments to a higher level of accuracy and efficiency; greatly enhances your products quality and profitability with added safety.

CO-MATIC --- A POWER OF GOOD ---

An Original Design Manufacturer and world's leader in woodworking powerfeeder technology, **CO-MATIC**, a TÜV certified CE and ISO 9001 company, fully computerized and standardized operation and production, manufactures wide range of stock and specialty powerfeeders to meet all your feeder requirements.

CO-MATIC prides to be a total solution provider.



1984 Company founded

1985 Adopted the latest manufacturing techniques for producing woodworking power feeders.

1986 Products sold to over 30 countries in the world, including Germany, Italy, Japan, USA, U.K. and France, ... etc., became the largest manufacturer of woodworking power feeders in the world.

1987 Adopted fully computer controlled company operation, quality control and Just-In-Time production control system.

1988 Awarded the "Special Prize" in the Excellent Woodworking Machinery Contest by the Taiwan Woodworking Machinery Association (TWMA), one of the four "Brand New" winners.

1991 Exclusively offered the 5-year warranty for domestic and overseas customers. Awarded the "Excellent Quality Prize" by the Taiwan Machinery Association and CETRA.

1992 Products sold to 50 countries. Over 50% market share in Germany and USA.

1993 Exclusively invested in die casting for feeder body, upgrading product quality and standardization. Entered a new era for power feeder production.

1994 Products achieve CE Certification.

1995 Achieved UL of USA and CSA (CUL) of Canada accreditation (RU).

1996 ISO-9002 certified (TÜV), Developed the smallest feeder, the "Baby Feeder", in the world. The Symbol of Excellence winner.

1997 Exclusively developed the Curved Feeder (the first ever). Awarded "Good Design Product" by CETRA & TWMA.

1999 Developed flagship model of the feeder industry~The Easy Feeder, with Memo Lock System. Awarded the "Superior Product".

2001 Programming the exclusive DOS (Detail Oriented customer Service) with specialty feeders' R&D for the best customer satisfaction including:

PRO-TRACK:

World's 1st true production Track Feeder allows smallest 31mm (1-1/4") feeding stocks.

SAW-MATE:

World's 1st powerfeeder specially designed for Table Saw.

JOINT-MATE:

World's 1st powerfeeder specially designed for jointer.





Table of Contents

Easy Feeder / E.Z.	p2~4
• Users-Friendly, Flagship models. EZ/300, EZ/400	
Heavy-Duty / AF Series	p5~7
• Popular powerfeeders for industrial applications. 4-Speed Feeder: AF/34, AF/44, 8-Speed Feeder: AF/38, AF/48, Variable-Speed Feeder: AF/30, AF/40	
ARC Feeders / TF Series	p8~10
• Users-Friendly with unique Arc Support & Auto Lock. 6-Speed Feeder: TF/36, TF/46, TF/406, TF/66, TF/76,	
Light Heavy-Duty / AF Series	p11
• Suitable for cabinet works & combining machines. Cabinet Feeder: AF/308, AF/408,	
Light -Duty / AF Series	p12
• Ideal for habit users, D.I.Y. works. Junior Feeder: AF/32, Baby Feeder: M/3,	
Specialty / AF Series	p13~17
• Exclusive models for applications. For curve stocks feeding: AF/C3, For shorter pieces feeding: AF/54, AF/04, AF/08S For Table Saw feeding: AF/24 For circumference profiling or edge banding: AF/12, AF/14R For Bandsaw feeding: AF/16, AF/18A	
Accessories	p18~20
Universal Stands: SS/03, US/01, US/02, US/03, US/04, Mounting Attachment: -- Flipper FP/01: Flip-away mounting attachment. -- Quick Holder QH-01: Drill free mounting attachment. Rollers & Belts	

Easy Feeders

E.Z. SMART. FRIENDLY.




It's the "PERFECT HELPER" for the "REAL PROS."

Easy Feeder (With SMART Stand)

EZ/300



- Memo-Lock
- Front elevation
- 90°/180° Auto Lock
- 1050 mm Over-Arm
- 3 Dual Rollers
- Variable Speeds
- 3/4 HP (0.563 KW) Motor

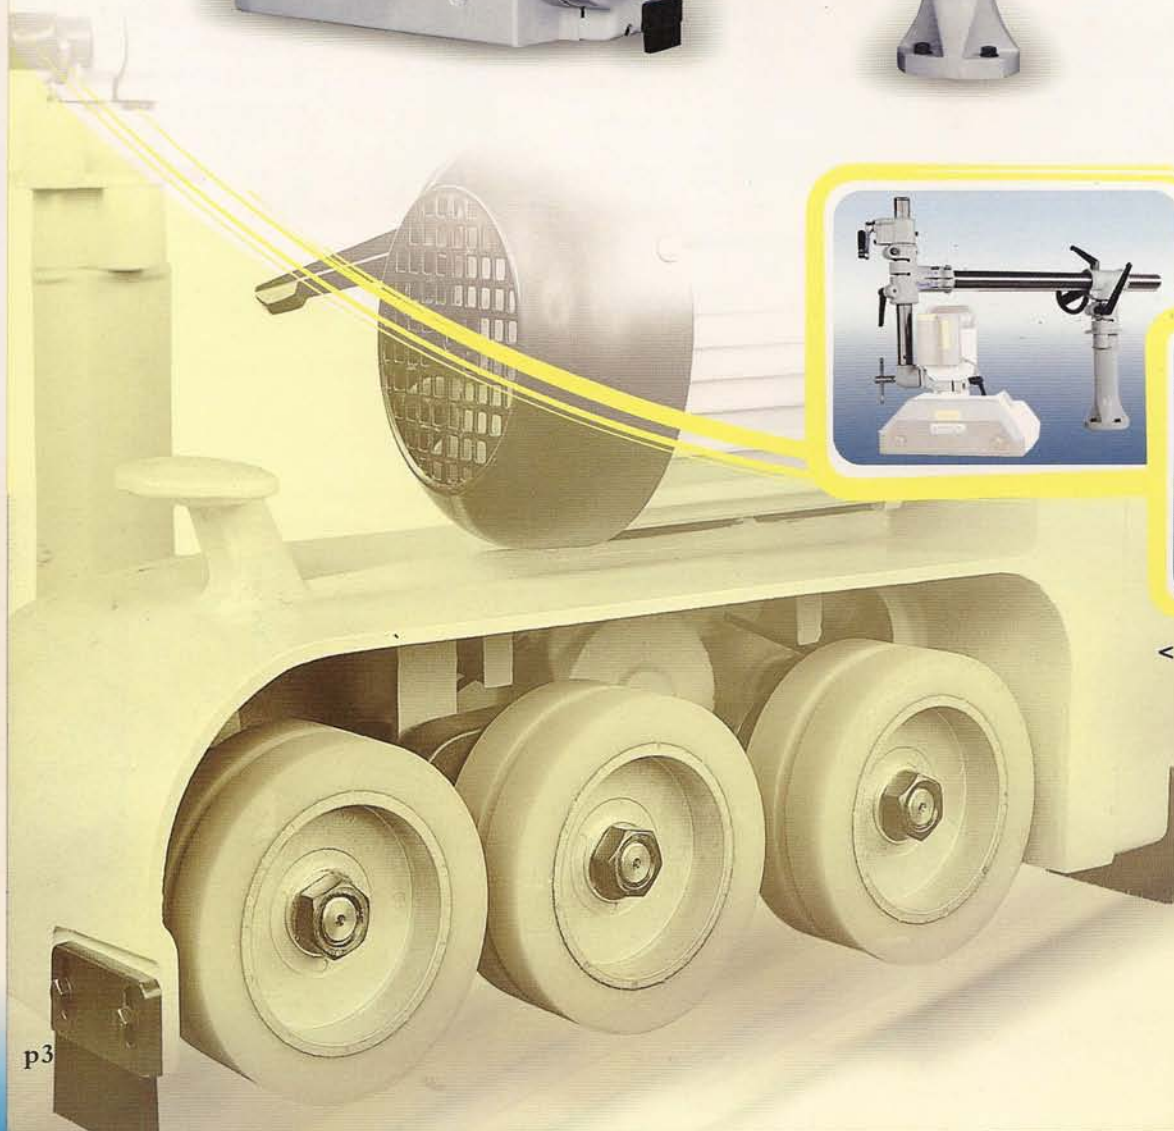

<< **SMART STAND (SS/03)**
with adaptor joint is applicable
as an option for all heavy-duty
feeders.

EZ/400



- Memo-Lock
- Front elevation
- 90°/180° Auto Lock
- 1050 mm Over-Arm
- 4 Dual Rollers
- Variable Speeds
- 3/4 HP (0.563 KW) Motor



Model

Overall Dimensions:

Height (w/Handle)
Width
Length (w/Handle and Arm Fully Extended)
Shipping Weight
Weight in Place
Carton #1 Size
Carton #2 Size
Carton #3 Size

Motor:

Horsepower
Rotation

Specifications:

Number of Speeds
Range of Speeds
Rollers
Roller Suspension
Distances Between Rollers (Center-to-Center)
Vertical Movement
Horizontal Movement
Max. Height of Rollers Parallel to Tabletop
20' Container Load

EZ/300

800 mm (31.5")
555 mm (21.85")
1300 mm (51.18")
82 kg (180 lb)
77 kg (170 lb)
645x400x310mm (25.4"x15.75"x12")
770x320x290mm (30.3"x12.6"x11.42")
1070x60x60mm (42.13"x2.36"x2.36")

3/4 HP (0.563 KW) / 3 Phase only
Forward / Reverse


Variable Speeds
2-20 M/min (6.5-66 Ft/m)
Ø120x25mmx6pcs (Ø4-3/4"x1"x6pcs) / PU
30 mm (1.18")
151-135 mm (5.93"-5.31")
212 mm (8.35")
745 mm (29.33")
190 mm (7.48")
180 Sets (540 Cartons)

EZ/400

800 mm (31.5")
711 mm (27.99")
1530 mm (60.1")
91 kg (200 lb)
87 kg (192 lb)
755x400x310mm (29.7"x15.7"x12.2")
770x320x290mm (30.3"x12.6"x11.42")
1070x60x60mm (42.13"x2.36"x2.36")

3/4 HP (0.563 KW) / 3 Phase only
Forward / Reverse

Variable Speeds
2-20 M/min (6.5-66 Ft/m)
Ø120x25mmx8pcs (Ø4-3/4"x1"x8pcs) / PU
30 mm (1.18")
135-151-135 mm (5.31"-5.94"-5.31")
212 mm (8.35")
745 mm (29.33")
190 mm (7.48")
160 Sets (480 Cartons)

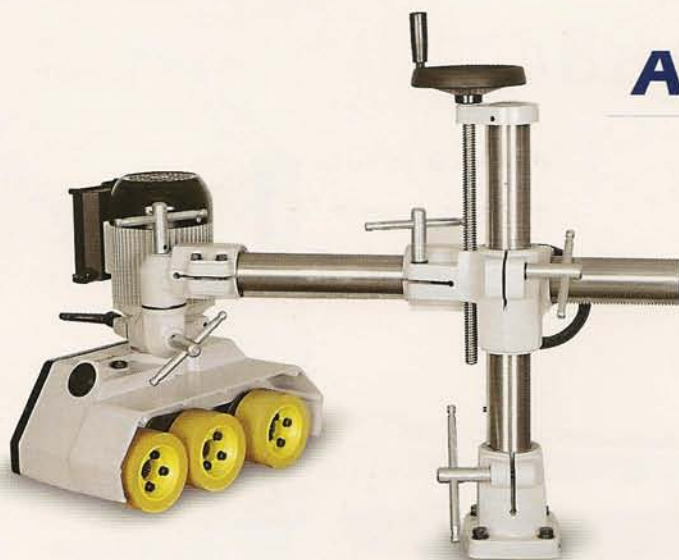

AF/34

4-Speed Feeder

- 3 Rollers, 4 Speeds.
- 1 HP (0.75KW) Motor. (Single or 3 Phase)
- Smart Stand (SS/03) Optional.



AF/44

4-Speed Feeder

- 4 Rollers, 4 Speeds.
- 1 HP (0.75KW) Motor. (Single or 3 Phase)
- Smart Stand (SS/03) Optional.



• Switch Knob and gear position exchange provide 4 speeds, (Optional extra gear set, XG-4+4 to double available speeds.)



Model

Overall Dimensions:

Height (w/Handle)
Width
Length (w/Handle and Arm Fully Extended)
Shipping Weight
Weight in Place
Carton #1 Size
Carton #2 Size

Motor:

Horsepower
Rotation

Specifications:

Number of Speeds
Range of Speeds

Rollers

Roller Suspension
Distances Between Rollers (Center-to-Center)
Vertical Movement
Horizontal Movement
Max. Height of Rollers Parallel to Tabletop
20' Container Load

AF/38



8-Speed Feeder

- 3 Rollers, 8 Speeds.
- 1 HP (0.75KW) Motor.
(Single or 3 Phase)
- Smart Stand (SS/03) Optional.



AF/48

8-Speed Feeder

- 4 Rollers, 8 Speeds.
- 1 HP (0.75KW) Motor.
(Single or 3 Phase)
- Smart Stand (SS/03) Optional.



<< Speed Lever--
With Switch Knob and
gear position provide
8 speeds.

AF/34

750 mm (29.53")
460 mm (18.11")
1100 mm (43.3")
65 kg (143 lb)
61 kg (134 lb)
560x540x290mm (22.05"x21.26"x11.42")
770x320x290mm (30.3"x12.6"x11.42")

1 HP (0.75 KW)/1 or 3 Phase
Forward / Reverse

4 Speeds
4/8/11/22 M/min (13/26/36/72 Ft/m)

Ø120x60mmx3pcs (Ø4-3/4"x2-1/4"x3pcs)
/ Synthetic Rubber
18 mm (0.71")
129-150 mm (5.08"-5.91")
250 mm (9.84")
460 mm (18.07")
215 mm (8.46")
185 Sets (370 Cartons)

AF/44

750 mm (29.48")
600 mm (23.58")
1100 mm (43.3")
70 kg (154 lb)
66 kg (145 lb)
770x560x290mm (30.3"x22.05"x11.42")
770x320x290mm (30.3"x12.6"x11.42")

1 HP (0.75 KW)/1 or 3 Phase
Forward / Reverse

4 Speeds
4/8/11/22 M/min (13/26/36/72 Ft/m)

Ø120x60mmx4pcs (Ø4-3/4"x2-1/4"x4pcs)
/ Synthetic Rubber
18 mm (0.71")
133-151-127 mm (5.15"-5.94"-5")
250 mm (9.84")
460 mm (18.11")
207 mm (8.15")
150 Sets (300 Cartons)

AF/38

750 mm (29.53")
460 mm (18.11")
1100 mm (43.3")
67 kg (147 lb)
63 kg (139 lb)
560x540x290mm (22.05"x21.26"x11.42")
770x320x290mm (30.3"x12.6"x11.42")

1 HP (0.75 KW)/1 or 3 Phase
Forward / Reverse

8 Speeds
2/4/5.5/6.7/11/13/16.5/33 M/min
(6.5/13/18/22/36/43/55/108 Ft/m)

Ø120x60mmx3pcs (Ø4-3/4"x2-1/4"x3pcs)
/ Synthetic Rubber
18 mm (0.71")
129-150 mm (5.08"-5.91")
250 mm (9.84")
460 mm (18.11")
215 mm (8.46")
185 Sets (370 Cartons)

AF/48

750 mm (29.53")
600 mm (23.58")
1100 mm (43.3")
72 kg (158 lb)
68 kg (150 lb)
770x560x290mm (30.3"x22.05"x11.42")
770x320x290mm (30.3"x12.6"x11.42")

1 HP (0.75 KW)/1 or 3 Phase
Forward / Reverse

8 Speeds
2/4/5.5/6.7/11/13/16.5/33 M/min
(6.5/13/18/22/36/43/55/108 Ft/m)

Ø120x60mmx4pcs (Ø4-3/4"x2-1/4"x4pcs)
/ Synthetic Rubber
18 mm (0.71")
133-151-127 mm (5.24"-5.94"-5")
250 mm (9.84")
460 mm (18.11")
215 mm (8.46")
150 Sets (300 Cartons)



AF/30

Variable-Speed Feeder

- 3 Rollers , Variable Speeds.
- 1 HP (0.75KW) Motor, (3 Phase Only)
- Smart Stand (SS/03) Optional.



AF/40

Variable-Speed Feeder

- 4 Rollers , Variable Speeds.
- 1 HP (0.75KW) Motor, (3 Phase Only)
- Smart Stand (SS/03) Optional.



Model

Overall Dimensions:

Height (w/Handle)
Width
Length (w/Handle and Arm Fully Extended)
Shipping Weight
Weight in Place
Carton #1 Size
Carton #2 Size

Motor:

Horsepower
Rotation

Specifications:

Number of Speeds
Range of Speeds

Rollers

Roller Suspension
Distances Between Rollers (Center-to-Center)
Vertical Movement
Horizontal Movement
Max. Height of Rollers Parallel to Tabletop
20' Container Load

AF/30

750 mm (29.53")
490 mm (19.29")
1100 mm (43.3")
70 kg (154 lb)
66 kg (145 lb)
560x540x290mm (22.05"x21.26"x11.42")
770x320x290mm (30.3"x12.6"x11.42")

1 HP (0.75 KW) / 3 Phase Only
Forward / Reverse

Variable Speeds
2.9-15.5 M/min (9.5-51 Ft/m) 60 HZ,
2.4-13 M/min (8-42.6 Ft/m) 50 HZ
Ø120x60mmx3pcs (Ø4-3/4"x2-1/4"x3pcs)
/ Synthetic Rubber
22 mm (0.9")
150-155 mm (5.9"-6.1")
250 mm (9.84")
460 mm (18.11")
185 mm (7.28")
185 Sets (370 Cartons)

AF/40

750 mm (29.53")
490 mm (19.29")
1100 mm (43.3")
75 kg (165 lb)
71 kg (156 lb)
770x560x290mm (30.3"x22.05"x11.42")
770x320x290mm (30.3"x12.6"x11.42")

1 HP (0.75 KW) / 3 Phase Only
Forward / Reverse

Variable Speeds
2.9-15.5 M/min (9.5-51 Ft/m) 60 HZ,
2.4-13 M/min (8-42.6 Ft/m) 50 HZ
Ø120x60mmx4pcs (Ø4-3/4"x2-1/4"x4pcs)
/ Synthetic Rubber
22 mm (0.9")
150-153-155 mm (5.9"-6"-6.1")
250 mm (9.84")
460 mm (18.11")
215 mm (8.46")
150 Sets (300 Cartons)

Arc Feeders

Users-Friendly & Powerful.

Extension

- Standard 500mm Over-Arm, optional 720mm, 1050mm

Horizontal Setting

- Precision taper control joint


6 Speeds

- 3 pulley-slots x 2 switch-positions = 6 speeds.
- Proper speed, better quality.

Gears Transmission, Powerful & Efficiency.

Angle Setting

- 90° / 180° Auto-Lock, simple conversion on top & side feeding position.
- Precision taper control joint.

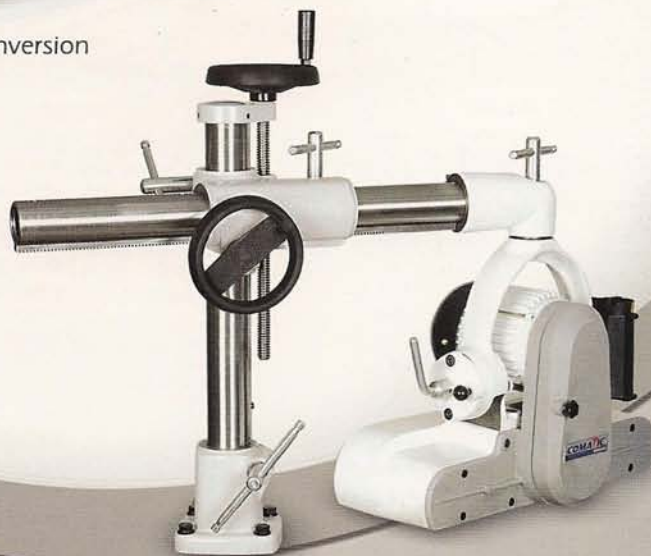


- << **TF/46U** • Heavy-Duty Universal Stand (US/13, with 720mm(28.3") Over-Arm). as standard option.
- Optional 1050mm(41.3") Over-Arm.



TF/36

3-Roller Arc Feeder

- 3 Rollers, 6 Speeds.
- 1/2 HP (0.375KW) Motor.
(3 Phase Only)
- 90°/180° Auto-Lock
- Universal Stand (US/13) as standard option.



TF/406



TF/46

4-Roller Arc Feeder

- 4 Rollers, 6 Speeds.
- 1/2 HP (0.375KW) Motor.
(3 Phase Only)
- 90°/180° Auto-Lock
- Universal Stand (US/13)
as standard option.

Model

Overall Dimensions:

Height (w/Handle)

Width

Length (w/Handle and Arm Fully Extended)

Shipping Weight

Weight in Place

Carton #1 Size

Carton #2 Size

Motor:

Horsepower

Rotation

Specifications:

Number of Speeds

Range of Speeds

Rollers

Roller Suspension

Distances Between Rollers (Center-to-Center)

Vertical Movement

Horizontal Movement

Max. Height of Rollers Parallel to Tabletop

20' Container Load

TF/36

800 mm (31.5")

445 mm (17.5")

680 mm (26.8")

67 kg (147 lb)

63 kg (139 lb)

625x525x355mm (24.6"x20.6"x13.9")

610x325x320mm (24"x12.8"x12.6")

1/2 HP (0.375 KW,) / 3 Phase Only

Forward / Reverse

6 Speeds

3.5/6.1/7.1/8.1/12.2/16.2 M/min

(11.5/20/23.3/26.6/40/53.1 Ft/m)

Ø100x50mmx3pcs (Ø3.9"x2"x3pcs)

/ Synthetic Rubber

18 mm (0.7")

104-184 mm

(4.1"-7.2")

190 mm (7.5")

190 mm (7.5")

180 mm (7.1")

146 Sets (292 Cartons)

TF/46

800 mm (31.5")

545 mm (21.5")

680 mm (26.8")

70 kg (154 lb)

66 kg (145 lb)

625x525x355mm (24.6"x20.6"x13.9")

610x325x320mm (24"x12.8"x12.6")

1/2 HP (0.375 KW,) / 3 Phase Only

Forward / Reverse

6 Speeds

3.5/6.1/7.1/8.1/12.2/16.2 M/min

(11.5/20/23.3/26.6/40/53.1 Ft/m)

Ø100x50mmx4pcs (Ø3.9"x2"x4pcs)

/ Synthetic Rubber

18 mm (0.7")

104-175-104 mm

(4.1"-6.9"-4.1")

190 mm (7.5")

190 mm (7.5")


180 mm (7.1")

146 Sets (292 Cartons)

TF/66

6-Roller Arc Feeder

- 6 Rollers, 6 Speeds.
- 1/2 HP (0.375KW) Motor. (3 Phase Only)
- 90°/180° Auto-Lock
- Universal Stand (US/13) as standard option.



TF/76

7-Roller Arc Feeder

- 6 Rollers, 6 Speeds.
- 1/2 HP (0.375KW) Motor. (3 Phase Only)
- 90°/180° Auto-Lock
- Universal Stand (US/13) as standard option.



Extra Strength PU

TF/406

800 mm (31.5")
545 mm (21.5")
680 mm (26.8")
69 kg (152 lb)
65 kg (143 lb)
625x525x355mm (24.6"x20.6"x13.9")
610x325x320mm (24"x12.8"x12.6")

1/2 HP (0.375 KW) / 3 Phase Only
Forward / Reverse

6 Speeds
3.5/6.1/7.1/8.1/12.2/16.2 M/min
(11.5/20/23.3/26.6/40/53.1 Ft/m)
Ø100x50mmx4pcs (Ø3.9"x2"x4pcs)
/ Synthetic Rubber
18 mm (0.7")
104-104-104 mm
(4.1"-4.1"-4.1")
190 mm (7.5")
190 mm (7.5")
180 mm (7.1")
146 Sets (292 Cartons)

TF/66

800 mm (31.5")
670 mm (21.5")
680 mm (26.8")
74 kg (163 lb)
70 kg (154 lb)
750x525x355mm (29.5"x20.6"x13.9")
610x325x320mm (24"x12.8"x12.6")

1/2 HP (0.375 KW) / 3 Phase Only
Forward / Reverse

6 Speeds
3.5/6.1/7.1/8.1/12.2/16.2 M/min
(11.5/20/23.3/26.6/40/53.1 Ft/m)
Ø100x50mmx6pcs (Ø3.9"x2"x6pcs)
/ Synthetic Rubber
18 mm (0.7")
104-104-104-104-104 mm
(4.1"-4.1"-4.1"-4.1"-4.1")
190 mm (7.5")
190 mm (7.5")
180 mm (7.1")
129 Sets (258 Cartons)


TF/76

800 mm (31.3")
390 mm (15.4")
680 mm (26.8")
65 kg (143 lb)
61 kg (134 lb)
625x525x355mm (24.6"x20.6"x13.4")
610x325x320mm (24"x12.8"x12.62")

1/2 HP (0.375 KW) / 3 Phase Only
Forward / Reverse

6 Speeds
2/4/5.5/6.7/11/13/16.5/33 M/min
(6.5/13/18/22/36/43/55/108 Ft/m)
Ø50x60mmx7pcs (Ø2"x2.4"x7pcs)
/ PU
X
50-50-50-50-50 mm
(2"-2"-2"-2"-2")
190 mm (7.5")
190 mm (7.5")
205 mm (8.1")
146 Sets (292 Cartons)

AF/308

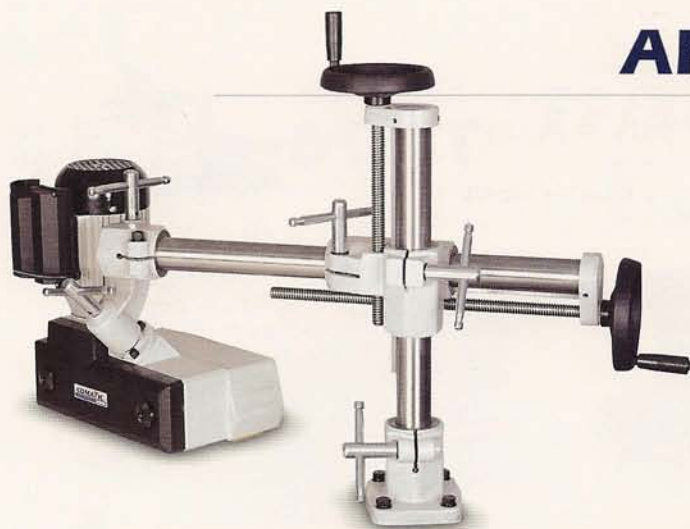

Cabinet Feeder

- 3 Rollers.
- 4 Speeds on single phase motor.
- 8 Speeds on three phase motor.
- 1/2 HP (0.375 KW) Motor.



AF/408

Cabinet Feeder

- 3 Rollers.
- 4 Speeds on single phase motor.
- 8 Speeds on three phase motor.
- 1/2 HP (0.375 KW) Motor.

Model

AF/308

AF/408

Overall Dimensions:

Height (w/Handle)
Width
Length (w/Handle and Arm Fully Extended)
Shipping Weight
Weight in Place
Carton #1 Size
Carton #2 Size

Motor:

Horsepower
Rotation

Specifications:

Number of Speeds
Range of Speeds

Rollers

Roller Suspension
Distances Between Rollers (Center-to-Center)
Vertical Movement
Horizontal Movement
Max. Height of Rollers Parallel to Tabletop
20' Container Load

630 mm (24.8")
390 mm (15.35")
1000 mm (39.37")
54 kg (119 lb)
50 kg (110 lb)
520x470x260 mm (20.5"x18.5"x10.24")
770x230x260 mm (30.3"x9.06"x10.24")

1/2 HP (0.375 KW) / 1 or 3 Phase
Forward / Reverse

4 Speeds (1 PH) / 8 Speeds (3 PH)
2.9/4.5/7.5/11.5 M/min (9.5/15/25/38 Ft/m) / 1 PH
2.9/4.5/5.8/7.5/9/11.5/15/23 M/min
(9.5/15/19/25/30/38/50/76 Ft/m) / 3 PH
Ø100x50mmx3 (Ø4"x2"x3) / Synthetic Rubber
24 mm (0.94")
120-131 mm (4.72"-5.15")
260 mm (10.24")
415 mm (16.34")
200 mm (7.86")
276 Sets (552 Cartons)

630 mm (24.8")
550 mm (21.65")
1000 mm (39.37")
57 kg (127 lb)
53 kg (117 lb)
770x560x290mm (30.3"x22.05"x11.42")
770x230x260mm (30.3"x9.06"x10.24")

1/2 HP (0.375 KW) / 1 or 3 Phase
Forward / Reverse

4 Speeds (1 PH) / 8 Speeds (3 PH)
2.9/4.5/7.5/11.5 M/min (9.5/15/25/38 Ft/m) / 1 PH
2.9/4.5/5.8/7.5/11.5/15/23 M/min
(9.5/15/19/25/30/38/50/76 Ft/m) / 3 PH
Ø100x50mmx4 (Ø4"x2"x4) / Synthetic Rubber
15 mm (0.59")
110-143-110 mm (4.33"-5.63"-4.33")
260 mm (10.24")
415 mm (16.34")
200 mm (7.86")
155 Sets (310 Cartons)



AF/32

Junior Feeder

- 3 Rollers, 4 Speeds
- 1/4 HP (0.188 KW) Motor, (Single or 3 Phase)
- Optional Extra Gear Set XG-2+4 With Additional 2 Speeds.



Quick Holder >>
(QH-01) applicable.



M/3

Baby Feeder

- The most lightweight, versatile unit for efficient, precision jobs.
- Patented 3-D ball-style adjustable.
- Easy reset between top feeding & side feeding.
- Dust-Hood, Fine Sliding Adjustment, Emergency Switch.
- Easy attached to shapers, circular saws, jointers and router tables.

Quick Holder >>
(QH-01) applicable.



AF Series

Light Duty


Model	AF/32	M/3
Overall Dimensions:		
Height (w/Handle)	590 mm (23.2")	265 mm (10.42")
Width	300 mm (11.8")	320 mm (12.6")
Length (w/Handle and Arm Fully Extended)	700 mm (27.5")	530 mm (20.87")
Shipping Weight	34 kg (75 lb)	12 kg (26.4 lb)
Weight in Place	32 kg (71 lb)	10.5 kg (23 lb)
Carton #1 Size	580x580x280mm (22.8"x22.8"x11")	560x280x230mm (22.05"x11"x9.1")
Motor:		
Horsepower	1/4 HP (0.18 KW) / 1 or 3 Phase	1/8 HP (0.094 KW) / 1 Phase Only
Rotation	Forward / Reverse	Forward / Reverse
Specifications:		
Number of Speeds	4 Speeds	Variable Speeds
Range of Speeds	6/8/10/13 M/min (60Hz) , 5/6.5/8/11 M/min (50Hz) [20/26/33/43 Ft/m (60Hz) , 16/21/26/36 Ft/m (50Hz)]	2-12 M/min (6.5-40 Ft/m)
Rollers	Ø80x30mmx3pcs (Ø3-1/8"x1-3/16"x3pcs) / Synthetic Rubber	Ø76x30mmx3pcs(Ø4-3/4"x1"x3pcs)/PU
Roller Suspension	18 mm (0.7")	8.3 mm (0.33")
Distances Between Rollers (Center-to-Center)	110-85 mm (4.33"-3.35")	90-110 mm (3.54"-4.33")
Vertical Movement	166 mm (6.52")	X
Horizontal Movement	250 mm (9.8")	Over-Arm Sliding : 260 mm (10.24")
Max. Height of Rollers Parallel to Tabletop	150 mm (6")	150 mm (6")
20' Container Load	320 Sets (320 Cartons)	840 Sets (840 Cartons)




AF/C3

Curve Feeder

- Special for Curve stocks
- 3 Rollers, 4 Speeds.
- 1 HP (0.75 KW) Motor, (Single or 3 Phase), Optional with Servo Motor.
- Smart Stand (SS/03) Optional.




>> Curved stock cutting on table saw.



>> Edge sloping on shaper.



>> Internal curve shaping on shaper.



>> External curve shaping on shaper.




Exclusive designed rear roller adjustable for curve workpiece feeding, minimum radius of 300mm.



AF/54

5-Roller Feeder

- 5 Rollers, 4 Speeds
- 1 HP (0.75 KW) Motor, (Single or 3 Phase)
- Smart Stand (SS/03) Optional.



106-104-100-106 mm (4.2"-4.1"-3.9"4.2")

Model

Overall Dimensions:

Height (w/Handle)
Width
Length (w/Handle and Arm Fully Extended)
Shipping Weight
Weight in Place
Carton #1 Size
Carton #2 Size

Motor:

Horsepower
Rotation

Specifications:

Number of Speeds
Range of Speeds
Rollers
Roller Suspension
Distances Between Rollers (Center-to-Center)

Vertical Movement
Horizontal Movement
Max. Height of Rollers Parallel to Tabletop
20' Container Load

AF/C3

750 mm (29.48")
160 mm (6.3")
1100 mm (43.3")
70 kg (154 lb)
66 kg (145 lb)
770x560x290mm (30.3"x22.05"x11.42")
770x320x290mm (30.3"x12.6"x11.42")

1 HP, 1 or 3 Phase / (0.75KW, 1 or 3 Phase)
Forward / Reverse

4 Speeds
4/8/11/22 M/min (13/26/36/72 Ft/m)
Ø120x60mmx3pcs (Ø4-3/4"x2-1/4"x3pcs)
/ Synthetic Rubber
18 mm (0.71")
147-131 mm (5.79"-5.16")
250 mm (9.84")
460 mm (18.11")
195 mm (7.66")
185 Sets (370 Cartons)

AF/54

750 mm (29.53")
600 mm (23.62")
1100 mm (43.3")
68 kg (150 lb)
64 kg (141 lb)
700x560x300mm (27.56"x22.05"x11.81")
700x320x290mm (30.3"x12.6"x11.42")

1 HP, 1 or 3 Phase / (0.75KW, 1 or 3 Phase)
Forward / Reverse


4 Speeds
4/8/11/22 M/min (13/26/36/72 Ft/m)
Ø100x50mmx4 (Ø4"x2"x4) / Synthetic Rubber
20 mm (0.79")
106-104-100-106 mm (4.2"-4.1"-3.9"4.2")
250 mm (9.84")
460 mm (18.11")
215 mm (8.46")
150 Sets (300 Cartons)



AF/04

Track Feeder


- Special for Shorter Pieces
- 4 Speeds
- 1 HP (0.75 KW) Motor, (Single or 3 Phase)
- Smart Stand (SS/03) Optional.



AF/08S

Pro-Track Feeder With SMART Stand

- World's 1st true production Track Feeder.
- 50 mm small stock allowed, perfect for small stock production.
- Unique CO-MATIC 216 system:
 >> 2 + 1 Tri-metal pulleys structure.
 >> 6 independently suspended (8mm) set rollers.
- 1 HP (0.75 KW) Motor, (Single or 3 Phase)
- Equipped with Smart Stand (SS/03), standard-option with Universal Stand.

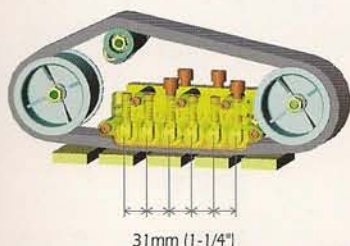

Model

Overall Dimensions:

Height (w/Handle)
 Width
 Length (w/Handle and Arm Fully Extended)
 Shipping Weight
 Weight in Place
 Carton #1 Size
 Carton #2 Size
 Carton #3 Size

Motor:

Horsepower
 Rotation

Specifications:

Number of Speeds
 Range of Speeds

Belts

Roller Suspension

Distances Between Rollers (Ceter-to-Center)
 Vertical Movement
 Horizontal Movement
 Max. Height of Belts Parallel to Tabletop
 20' Container Load

AF/04

750 mm (29.94")
 600 mm (23.58")
 1100 mm (43.3")
 68 kg (150 lb)
 64 kg (141 lb)
 700x560x300mm (27.56"x22"x11.81")
 770x320x290mm (27.56"x12.6"x11.42")
 X
 1 HP, 1 or 3 Phase / (0.75KW,1 or 3 Phase)
 Forward / Reverse
 4 Speeds
 4.5/9/12/24 M/min (14.5/29/39/78 Ft/m)
 Ø118x12.7mmx3pcs (Ø44"x1/2"x3pcs)
 / Synthetic Rubber
 20 mm (0.79")
 106-104-100-106 mm (4.2"-4.1"-3.9"4.2")
 250 mm (9.84")
 460 mm (18.11")
 215 mm (8.46")
 150 Sets (300 Cartons)

AF/08S

800 mm (31.5")
 555 mm (21.85")
 1300 mm (51.18")
 82 kg (180 lb)
 77 kg (170 lb)
 770x560x290mm (30.3"x22.05"x11.42")
 770x320x290mm (30.3"x12.6"x11.42")
 1070x60x60mm (42.13"x2.36"x2.36")
 1 HP, 1 or 3 Phase / (0.75KW,1 or 3 Phase)
 Forward / Reverse
 8 Speeds
 2.5/3.5/5/7/9/11.5/18/23 M/min
 (8.2/11.5/16.4/23/29.5/37.7/59/75.5 Ft/m)
 995x75x14mmx1pc (39"x3"x9/16"x1pc)
 / Synthetic Rubber
 8 mm (0.3")
 31 mm (1.2")
 250 mm (9.84")
 460 mm (18.11")
 160 mm (6.3")
 150 Sets (450 Cartons)



AF/24


Saw-Mate Feeder

- World's 1st powerfeeder specially designed for Table Saw.
- It is a "BLADE GUARD", "HOLD DOWN", "FEATHER BORAD" & "ANTI-KICKBACK" all in one.
- Dual-rollers provide saw blade clearance of up to 70mm (2 3/4") "ABOVE" feeding stock, reflect "EFFECTIVE CUTTING" of the blade, more vertical cutting (Downward) than diagonal cutting (Pushing.)
- 2 Dual Rollers, 4 Speeds
- 1/2 HP(0.75KW), Single or 3 Phase.



<< AF/24S

- Smart Stand (SS/03) as standard option.

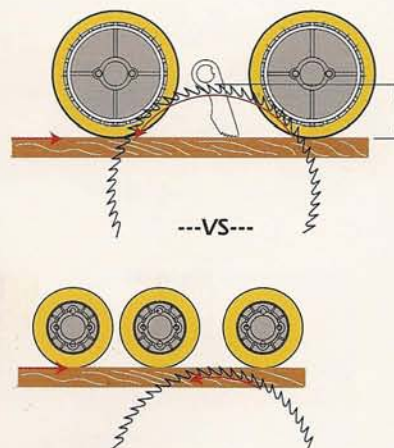

Model

Overall Dimensions:

Height (w/Handle)
Width
Length (w/Handle and Arm Fully Extended)
Shipping Weight
Weight in Place
Carton #1 Size
Carton #2 Size
Carton #3 Size

Motor:

Horsepower
Rotation

Specifications:

Number of Speeds
Range of Speeds
Rollers
Roller Suspension
Distances Between Rollers (Center-to-Center)
Vertical Movement
Horizontal Movement
Max. Height of Rollers Parallel to Tabletop
20' Container Load

AF/24(S)

750 mm (29.53")
488 mm (19.3")
1480 mm (58.3")
74 kg (163 lb)
69 kg (152 lb)
560x540x290mm (22.05"x21.26"x11.42")
770x320x290mm (30.3"x12.6"x11.42")
1070x60x60mm (42.13"x2.36"x2.36")
1/2 HP (0.375 KW) / 1 or 3 Phase
Forward / Reverse
4 Speeds
4/8/11/22 M/min (13/26/36/72 Ft/m)
Ø180x20mmx4pcs (7"x4-3/4"x4pcs)
/ PU
28 mm (1.1")
290 mm (11.4")
250 mm (10")
960 mm (37.8")
138 mm (5.4")
185 Sets (555 Cartons)



AF/12

Copying Feeder

- Ideal for circumference profiling on shaper.
- Ideal for edge banding on edgebander.
- Circular, Semi-circular, Oval shapes.
- 8 Speeds
- 1/4 HP (0.18 KW) Motor, (Single or 3 Phase)



AF/14R

Copying Feeder

- Ideal for circumference profiling on shaper.
- Ideal for edge banding on Edge Bander.
- Circular, Semi-circular, Oval shapes.
- 8 Speeds
- 1/2 HP (0.375 KW) Motor, (Single or 3 Phase)

AF/14L>> Left Side (optional)



Model

Overall Dimensions:

Height (w/Handle)
Width
Length (w/Handle and Arm Fully Extended)
Shipping Weight
Weight in Place
Carton #1 Size
Carton #2 Size

Motor:

Horsepower
Rotation

Specifications:

Number of Speeds
Range of Speeds
Rollers

Roller Suspension
Distances Between Rollers (Center-to-Center)
Vertical Movement
Horizontal Movement
Max. Height of Rollers Parallel to Tabletop
20' Container Load

AF/12

590 mm (23.23")
150 mm (5.91")
785 mm (30.91")
34 kg (75 lb)
32 kg (71 lb)
580x580x280mm (22.83"x22.83"x11.02")
X
1/4 HP (0.18 KW) / 1 or 3 Phase
Forward / Reverse
8 Speeds
4/6/8/11/13/17/22/33 M/min
(8/20/26.3/36.1/42.6/55.8/72.2/108.3 Ft/m)
Ø120x25mmx1pc (4-3/4"x1"x1pc)
/ PU
X
X
166 mm (6.5")
250 mm (10")
205 mm (8")
320 Sets (320 Cartons)

AF/14R(L)

750 mm (29.53")
380 mm (14.96")
X
58 kg (141 lb)
54 kg (133 lb)
560x540x290mm (22.05"x21.26"x11.42")
770x320x290mm (30.3"x12.6"x11.42")
1/2 HP (0.375 KW) / 1 or 3 Phase
Forward / Reverse
8 Speeds
2.2/2.9/4.4/5.8/7.4/9.8/14.8/19.7 M/min
(7.2/9.5/14.5/19/24.3/32/48.6/64.7 Ft/m)
Ø180x40mmx1pc (7"x1/2"x1pc)
/ PU
25 mm (1")
X
260 mm (10")
415 mm (16.3")
145 mm (5.7")
185 Sets (370 Cartons)

AF/16P (Option)




AF/16

Bandsaw Feeder


- The most Light-Duty Bandsaw Feeder in the world.
- Ideal for bandsaw 400~600 mm (16"~24")
- Accommodate up to 120mm (5") thickness.
- Scaled Plate Fence (AF/16P optional)
- Dual PU Rollers, Optional Serrated Roller RO/11SA
- 6 Speeds
- 1/4 HP (0.18KW) Motor, (Single or 3 Phase)

AF/18A

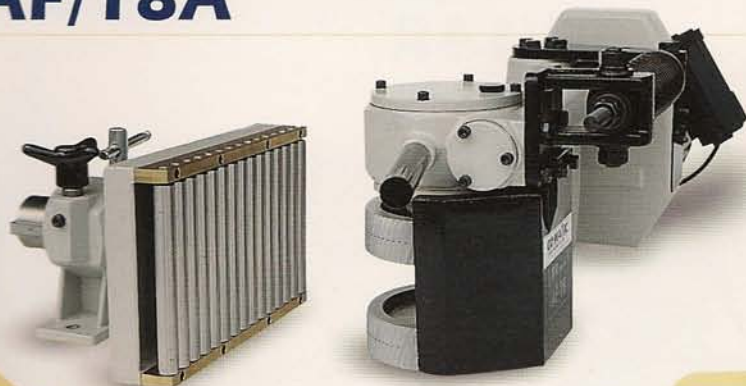

Bandsaw Feeder

- Heavy-Duty, ideal for bandsaw over 600 mm (24")
- Accommodate up to 160 mm (6") thickness
- Scaled Roller Fence
- Dual Serrated Rollers, optional PU roller RO/18
- 8 Speeds
- 1/2 HP (0.375 KW) Motor, Single or 3 Phase.



<<AF/18AL
Left Side (optional)

Model	AF/16	AF/16P	AF/18A
Overall Dimensions:			
Height (w/Handle)	340 mm (13.39")	X	300 mm (11.81")
Width	480 mm (18.9")	X	550 mm (21.65")
Length (w/Handle and Arm Fully Extended)	780 mm (30.71")	X	920 mm (36.22")
Shipping Weight	30 kg (65 lb)	10 kg (22 lb)	95 kg (211 lb)
Weight in Place	28 kg (62 lb)	9 kg (20 lb)	80 kg (177 lb)
Carton #1 Size	760x300x400mm (30"x11.8"x15.75")	220x210x180mm (8.66"x8.27"x7.09")	1150x420x400mm (45.28"x16.54"x15.75")
Motor:			
Horsepower	1/4 HP (0.18 KW) / 1 or 3 Phase	X	1/2 HP (0.375 KW) / 1 or 3 Phase
Rotation	Forward	X	Forward
Specifications:			
Number of Speeds	6 Speeds	X	8 Speeds
Range of Speeds	1.5/3/3.8/5.7/7.6/11.4 M/min (4.9/9.8/12.5/18.7/25/37.4 Ft/m)	X	3/5/6/8/10/13.5/17/28 M/min (10/17/20/27/33/45/57/93 Ft/m)
Rollers	Ø120x25mmx2pcs (Ø4-3/4"x2"x2pcs) / PU or Cast Steel	X	Ø180x40mmx2pcs (Ø7x1-1/2"x2pcs) / PU or Cast Steel
Thickness Allowed	120 mm (5")	X	150 mm (6")
Roller / Blade Clearance	100 mm (4")	X	100 mm (4")
Fence / Blade Clearance	X	100 mm (4")	100 mm (4")
20' Container Load	294 Sets (294 Cartons)	X	125 Sets (125 Wooden Cases)

Smart Stand



SS/03 (Heavy-Duty)

- DUCTILE Stand construction
- 1050mm Over-Arm, extra length for wider pieces.
- Front elevating structure.
- **Memo lock system**, memorizes original operating position. No more resetting after each tooling change or maintenance.
- **SMART STAND** applicable as an option for all heavy-duty feeders. AF/34,44,38,48,30,40, AF/04,54,C3,08,24,14R,14L

Universal Stand

US/01 (Light-Duty)



US/02 (Light-Heavy Duty)



US/03 (Heavy-Duty)


- Standard Over-Arm length 720mm(28.3") **Item#77A**
- Optional Over-Arm length 1050mm(41.3") **Item#84B**



US/04 (TF Stand)

- Standard Over-Arm length 500mm(20") **Item#35F**
- Optional 720mm(28.3") **Item#77A**
- Optional 1050mm(41.3") **Item#84B**


Mounting Attachments

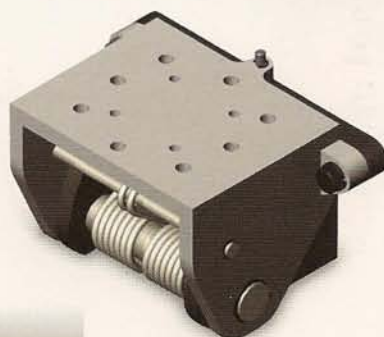

FP/01

Flipper


- **Flip-Away** Mounting Attachment, Convenience and Timesaving.
- Applicable for all powerfeeders.

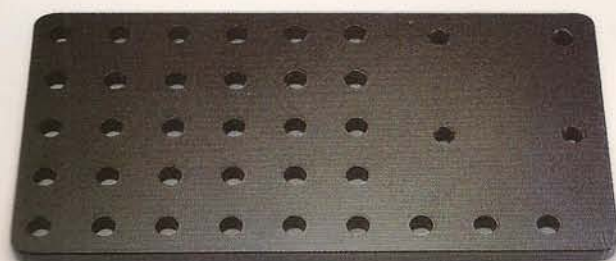

QH-01

Quick Holder

- Quick mounting on working tabletop, drill free.
- Applied on M/3, AF/32, AF/12, AF/16.

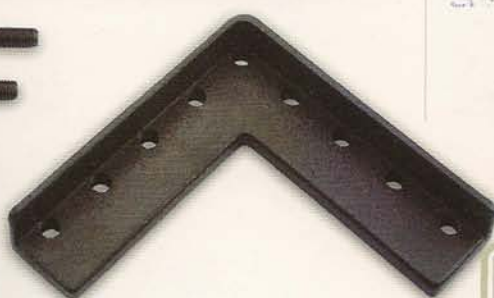

<<M/3 on a Shaper



<<AF/32 on a Shaper



<<M/3 on a Router Table



<<AF/16 on a Bandsaw

Rollers & Belts

>> Competitively priced quality rollers & belts are products of **CO-MATIC ROLLERS DIVISION**.

>> Rollers other than standard feeder applications are available upon request.

Item & Dimension

Model

► Money saving FRIENDLY ROLLER system
(RO/120A, RU/120A) with
REPLACEABLE ROLLER TIRE
(RO/120, RU/120)



RO/120A, RU/120A
12PCs / Case

► 120mm Dia. x 60mm W.
(4-3/4" x 2-1/4")

AF/34, AF/44



RO/120, RU/120
12PCs / Case

► 120mm Dia. x 60mm W.
(4-3/4" x 2-1/4")

AF/38, AF/48



RO-12
12PCs / Case

► 120mm Dia. x 60mm W.
(4-3/4" x 2-1/4")

AF/30, AF/40



RO-12SA
12PCs / Case

► 120mm Dia. x 60mm W.
(4-3/4" x 2-1/4")



RO-10
12PCs / Case

► 100mm Dia. x 50mm W.
(4" x 2")

AF/308, AF/408,
AF/54, TF/36,
TF/46, TF/66,
TF/406



RO/09
12PCs / Case

► 100mm Dia. x 60mm W.
(4" x 2-3/8")



RO/05
14PCs / Case

► 48mm Dia. x 60mm W.
(1-7/8" x 2-3/8")

TF/76



RO-08
12PCs / Case

► 80mm Dia. x 30mm W.
(3-1/8" x 1-3/16")

AF/32



RO-07
12PCs / Case

► 76mm Dia. x 30mm W.
(3" x 1-3/16")

M/3

Item & Dimension

Model



RO-11
12PCs / Case

► 120mm Dia. x 25mm W.
(4-3/4" x 1")

AF/12, AF/16,
EZ/300, EZ/400



RO/11SA
2PCs / Set

► 120mm Dia. x 25mm W.
(4-3/4" x 1")

AF/16,
EZ/300, EZ/400



RC-12
3PCs / Set

► 120mm Dia. x 60mm W.
(4-3/4" x 2-1/4")

AF/C3



RO/18
1PC

► 180mm Dia. x 40mm W.
(7" x 1-1/2")

AF/18A,



RA-18
2PCs / Set

► Roller Adaptor

AF/14R, AF/18A,



33B
3PCs / Set

► Feeding Belt
1118mm L. x 12.7mm W.
(44" x 1/2")

AF/18A,

AF/04,



87G

► 995mm L x 75mm W
x 14mm T
(39" x 3" x 1/2")

AF/08, AF/08S



RO/18B
1PC

► 180mm Dia. x 20mm W.
(7" x 3/4")

AF/24, AF/24S

Accessories



CO-MATIC MACHINERY CO., LTD.

473, San Feng Road, Houli, Taichung, Taiwan 421

Tel: +886-4-2556 7105

Fax: +886-4-2556 7109

<http://www.co-matic.com>

E-mail: comatic@ms13.hinet.net

A graphic of a globe showing the Eastern Hemisphere, with a bright sun or starburst effect over the Indian Ocean region.

A POWER OF GOOD

Specifications subject to change without prior notice.

CAT#:P91/0014 2003.04x1000